

7M (MC-146)

[7.0×1.5×1.40 mm]

6LC (308C)

[8.0×3.8×2.50 mm]

6K6 / 6K8

[6×2 / 8×3 mm]

SMD / Thru-hole Type
32.768 kHz Crystals

Frequency Tolerance Options

±5 ppm

±10 ppm

±20 ppm

Features

- Small size tuning fork crystal unit, with 7.0×1.5×1.4 mm, 8.0×3.8×2.5 mm, 6.0×2.0 / 8.0×3.0 mm
- Excellent heat resistance and environmental characteristics
- Excellent electric performance optimum for mobile communications, Office automation, Audiovisual application are exhibited
- RoHS compliant
- These can meet the requirements of re-flow profiling using lead-free soldering
- Applications: Small communications devices, Clock, Microcomputer, etc



Standard Specifications

Item / Type	7M (MC-146)	6LC (308C)	6K6 / 6K8
Frequency range	32.768 kHz		32.768 kHz (30~350 kHz)
Package size (L×W×H)	7.0×1.5×1.40 mm	8.0×3.8×2.50 mm	6.0×2.0 / 8.0×3.0 mm
Shunt capacitance	0.8 pF typ.	1.3 pF typ.	1.5 pF typ.
Equivalent series resistance	65 KΩ max.	50 KΩ max.	50 KΩ max.
Parabolic coefficient	±0.04×10 ⁻⁶ /°C ² max.		(-0.034±0.006)×10 ⁻⁶ /°C ² max.
Drive Level	1 μW max.		
Operating Temperature Range	-20°C~+70°C		
Storage Temperature Range	-40°C~+85°C		
Crystal Cut	XT-Cut		
Load Capacitance	6 pF, 7 pF, 9pF, 12.5pF		
Frequency Tolerance	±5 ppm, ±10ppm, ±20ppm (max.) at 25°C		
Turning Temperature	+25°C±5°C		
Insulation resistance	500 MΩ max.		
Frequency Aging (25°C)	±3 ppm / Year max.		

7M (MC-146)

[7.0×1.5×1.40 mm]

6LC (308C)

[8.0×3.8×2.50 mm]

6K6 / 6K8

[6×2 / 8×3 mm]

SMD / Thru-hole Type

32.768 kHz Crystals

Frequency Tolerance Options


±5 ppm

±10 ppm


±20 ppm

Outline Dimensions (Unit: mm)


7M (7.0×1.5×1.40 mm)

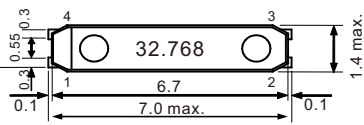


Top View



Side View




Bottom View /Internal Connection



Top View Suggested Layout


6LC (8.0×3.8×2.50 mm)




Top View



Side View




Bottom View /Internal Connection




Top View Suggested Layout

6K6 / 6K8 (6.0×2.0 / 8.0×3.0 mm)

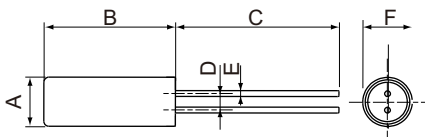

Side View

Bottom View



Side View

Size	A	B	C	D	E	F
2×6	∅2.0	6±0.3	7±0.3	0.7±0.2	0.2±0.1	∅2.0±0.1
3×8	∅3.0	8±0.3	10±0.3	1.1±0.2	0.3±0.1	∅3.0±0.1